



TECHNICAL DATA / FEATURES

dimensions:	ø220x87
light functions:	driving, parking
function markings:	HR, A
maximum power:	27W, 3W
nominal voltage:	12V-24V DC
permissible power supply voltage:	10.5V-30V DC
reference mark:	50, 25
source of light:	6 x LED
IP rating:	IP67, IP69K
work temperature:	-40°C - +80°C
housing's material:	aluminium
housing's colour:	black, chrome-plated
lens' material:	glass
built-in connectors:	-
other:	protection: - against overheating - against reverse polarisation
	screws made of Inox steel



ADDITIONAL INFORMATION

Stylish and robust lamps dedicated for trucks.

LED technology used in driving and position light guarantees the highest efficiency. Two reference marks are available what allows to choose optimal light range.


The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding or on vertical body work panels.

It is possible to install needed connectors on wire (on request).

DIMENSIONS

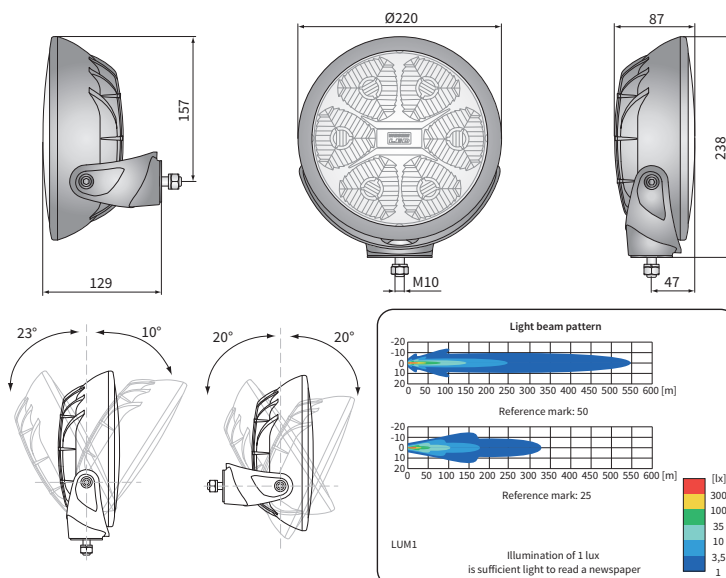

Cat. number	Hella Catal. No.	Homologation code	Light functions	Position light colour	Reference mark	IP rating	Accessories	Connectors
			driving	clear	50	IP67	LED module 12V-24V	AMP Faston 250
			parking	orange	25	IP69K	light cover	Deutsch DT
						housing	chrome-plated frame	AMP SuperSeal 1,5
						black	black frame	
						chrome-plated	cable 0,5 m	
							stabilizer hole	
LUM1.50800	1F8 011 002-001	084	✓	✓	✓	✓	✓	✓
LUM1.50804	1F8 011 002-001	084	✓	✓	✓	✓	✓	✓
LUM1.50880		084	✓	✓	✓	✓	✓	✓
LUM1.50805	1F8 011 002-001	084	✓	✓	✓	✓	✓	✓
LUM1.50806	1F8 011 002-001	084	✓	✓	✓	✓	✓	✓
LUM1.50810		084	✓	✓	✓	✓	✓	✓
LUM1.50850		087	✓	✓	✓	✓	✓	✓
LUM1.50853		087	✓	✓	✓	✓	✓	✓
LUM1.50854		087	✓	✓	✓	✓	✓	✓
LUM1.50855		087	✓	✓	✓	✓	✓	✓
LUM1.50860		087	✓	✓	✓	✓	✓	✓