



TECHNICAL DATA / FEATURES

- dimensions: 156x92x85
- source of light: H3
- maximum power: 70W
- nominal voltage: 12V-24V DC
- optics: standard
- light distribution angle: 46° x 15°
- IP rating: IP55
- housing's material: plastic
- housing's colour: black
- lens' material: glass
- built-in connectors: -
- other (optional): handle
switch
PC lens



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.





Mounting: as a freestanding on body panels. They shall be installed in an upright position.

The wiring runs through the length of the mounting bolt.

Do not use over 55W bulbs if the lamp is equipped with polycarbonate lens.

It is possible to install needed connectors on wire (on request).

DIMENSIONS

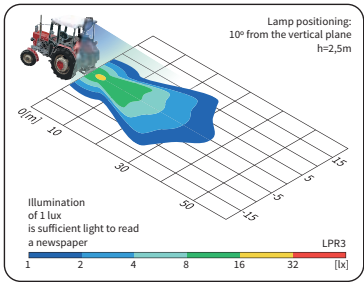

| Cat. number | Type | H3 | Lens material | glass | plastic | Accessories | bulb H3 12V | bulb H3 24V | handle | switch | cable 0,15 m | Bracket | shank | Mounting method | installed vertically up | Connectors | AMP Faston 250 | Deutsch DT | AMP SuperSeal 1,5 | Packaging / pc | blister pack |
|-------------|------|----|---------------|-------|---------|-------------|-------------|-------------|--------|--------|--------------|---------|-------|-----------------|-------------------------|------------|----------------|------------|-------------------|----------------|--------------|
| LPR3.15762 | ✓ | ✓ | ✓ | ✓ | | | | | | | | | ✓ | ✓ | ✓ | | | | | 1 | |
| LPR3.29462 | ✓ | ✓ | ✓ | ✓ | | | | | | ✓ | ✓ | | ✓ | ✓ | ✓ | | | | | 1 | |
| LPR3.15764 | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | | | ✓ | | ✓ | ✓ | ✓ | | | | | 1 | |
| LPR3.21362 | ✓ | ✓ | ✓ | ✓ | | | | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | | | | | 1 | |
| LPR3.18962 | ✓ | | ✓ | | | ✓ | | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | | | | | 1 | |